



# ADJUSTABLE PLASTIC PEDESTAL TECHNICAL DATA SHEET

**REFERENCE:** 914607

**Model:** TBR-1825

**Measures:** 18mm - 25mm

**Unit weight:** 210g.

## **BOX**

**UNITS:** 132

**WEIGHT:** 28,71kg


**DIMENSIONS:** 590x395x440mm

## **PALLET P1,2**

**BOX:** 8 (1056 pcs)

**WEIGHT:** 244

**DIMENSIONS:** 1200x800x1030

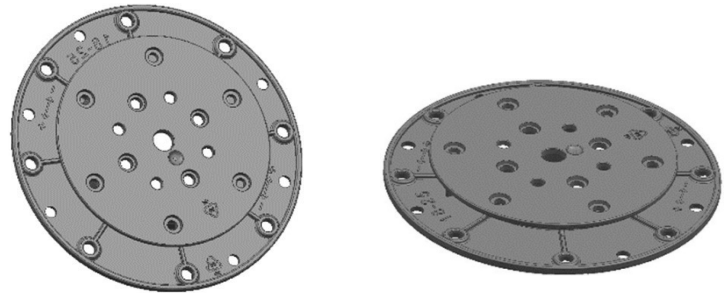

TBR pedestal for raised floors with adjustable height from 18 mm to 25 mm, provided of bicomponent head with slip rubber on top.

Pedestals are composed by a cylindrical base element of 200 mm diameter for resting on the laying surface, an intermediate screw with a locking security system.



## **Technical Features**

The products are produced From recycled (PP) materials.

Height range is 18 to 25 mm.

This pedestal is comprised with base, head and slope corrector

Top-diameter 148 mm, surface area 148 cm² and wall thick 5 mm

Bottom-diameter 200 mm, surface area 200 cm² and wall thick 5,5 mm

Resistant to bad weather conditions, UV light, aging and most of chemical reaction.

## **TEST RESULTS**

Position	Height (mm)	Load (daN)
1/1	18	2320
1/2	18	1855
1/4	18	1150
1/1	25	1625
1/2	25	1310
1/4	25	820



**1/1:** Load evenly applied across entirety of the load-bearing surface



**1/2:** load applied to half of load-bearing surface.



**1/4:** load applied to one quarter of the load-bearing surface.

**1 daN = 1 kg / f = 2,23 lb / f**



# ADJUSTABLE PLASTIC PEDESTAL TECHNICAL DATA SHEET

## ACCESSORIES

### AUTOLEVELLING



**TBR-TS3**  
AUTOLEVELLING HEAD  
CROSS 3 mm



**TBR-C**  
AUTOLEVELLING  
HEAD.



**TBR-WH**  
AUTOLEVELLING HEAD FOR  
WOODEN BEAM HEAD  
HOLDER - 40-50 mm



**TBR-WHS**  
AUTOLEVELLING  
HEAD FOR WOODEN  
BEAM HEAD SIMPLE -  
up to 80 mm.

### GENERAL ACCESSORIES



**TBF-SM3**  
Straight spacer 3mm.  
(bag 40 units) Height  
16mm.



**TBF-SC3**  
Plus shape formed joint  
strips can be sit in the  
middle of pedestal and  
have 3mm thickness.  
Height 16mm.



**TBF-W**  
This type of carcass  
assembly equipment  
is put every point on  
pedestal except central  
point.



**TBF-WH**  
X formed Carcass  
Assembly Equipment  
does sit on top and  
central of the pedestal.



**TB-A**  
DAMPER TB-A  
(40 Units Bags)



**TB-CL**  
ADJUSTABLE HEIGHT  
COMPLEMENT.



**TBR-CR**  
FIX COLLAR  
TB-CR.



**TB-DN**  
Slope Correctors, sit  
under bottom pedestal,  
avoids all impacts from  
drain slopes.

### OTHER ACCESSORIES



**TB-SP**  
WALL SPACER



**TB-MBF**  
METALLIC  
BOTTOM  
FRAME.



**TB-MTF**  
METALLIC TOP  
FRAME.



**TBR-AK**  
HEIGHT  
ADJUSTABLE KEY



**TB-PV**  
SCREW WIND  
PROTECTOR TB-  
PV (100 units  
Bag).

## Application

Adjustable pedestals TAYG allow to regulate accurate and permanent height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fiber glass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

Covering size	m <sup>2</sup> / pcs.
30 x 30 cm	13,80
40 x 40 cm	7,80
30 x 60 cm	6,70
40 x 60 cm	5,20
50 x 50 cm	5,00
60 x 60 cm	3,50

INDUSTRIAS TAYG, S.L.U  
Avenida Real de Madrid (Norte), 70

46469 BENIPARRELL

VALENCIA – SPAIN

[www.tayg.com](http://www.tayg.com)