



ADJUSTABLE PLASTIC PEDESTAL TECHNICAL DATA SHEET

REFERENCE: 914614

Model: TBR-2840

Measures: 28 - 40 mm

Unit weight: 217g.

BOX

UNITS: 90

WEIGHT: 20,97kg

DIMENSIONS: 510x403x410mm

PALLET P 1,2

BOX: 8 (720 pcs)

WEIGHT: 182kg

DIMENSIONS: 1200x800x970mm

TBR pedestal for raised floors with adjustable height from 28 mm to 40 mm, provided of bicomponent head with slip rubber on top.

Pedestals are composed by a cylindrical base element of 200 mm diameter for resting on the laying surface, an intermediate screw with a locking security system.

Technical Features

The products are produced From Recycled (PP).


Height range is 28 to 40 mm.

This pedestal is comprised with base, head and slope corrector.

Top-diameter 147mm, surface area 170 cm² and wall thick 5mm.

Bottom-diameter 195 mm, surface area 299 cm² and wall thick 5,5 mm.

Resistant to bad weather conditions, UV light, aging and most of chemical reaction.

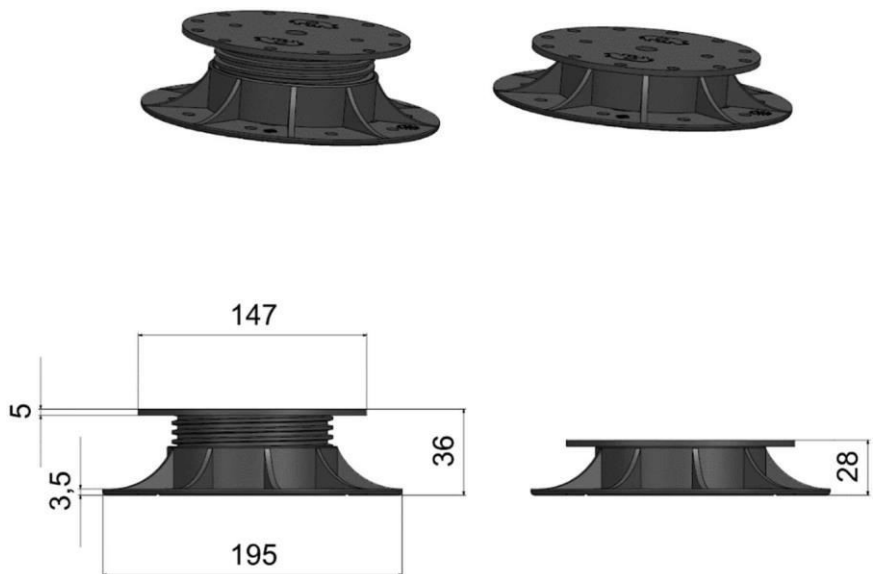

Test results

| Position | Height (mm) | Load (daN) |
|----------|-------------|------------|
| 1/1 | 28 | 2270 |
| 1/2 | 28 | 1785 |
| 1/4 | 28 | 1125 |
| 1/1 | 40 | 1560 |
| 1/2 | 40 | 1290 |
| 1/4 | 40 | 790 |



1/1: Load evenly applied across entirety of the load-bearing surface



1/2: load applied to half of load-bearing surface.



1/4: load applied to one quarter of the load-bearing surface.

1 daN = 1 kg / f = 2,23 lb / f



ADJUSTABLE PLASTIC PEDESTAL TECHNICAL DATA SHEET

ACCESSORIES

AUTOLEVELLING



TBR-TS3
AUTOLEVELLING HEAD
CROSS 3 mm



TBR-C
AUTOLEVELLING
HEAD.



TBR-WH
AUTOLEVELLING HEAD FOR
WOODEN BEAM HEAD
HOLDER - 40-50 mm



TBR-WHS
AUTOLEVELLING
HEAD FOR WOODEN
BEAM HEAD SIMPLE -
up to 80 mm.

GENERAL ACCESSORIES



TBF-SM3
Straight spacer 3mm.
(bag 40 units) height
16mm.



TBF-SC3
Plus shape formed joint
strips can be sit in the
middle of pedestal and
have 3mm thickness.
Height 16mm.



TBF-W
This type of carcass
assembly equipment
is put every point on
pedestal except central
point.



TBF-WH
X formed Carcass
Assembly Equipment
does sit on top and
central of the pedestal.



TB-A
DAMPER TB-A
(40 Units Bags)



TB-CL
ADJUSTABLE HEIGHT
COMPLEMENT.



TBR-CR
FIX COLLAR
TB-CR.



TB-DN
Slope Correctors, sit
under bottom pedestal,
avoids all impacts from
drain slopes.

OTHER ACCESSORIES



TB-SP
WALL SPACER



TB-MBF
METALLIC
BOTTOM
FRAME.



TB-MTF
METALLIC TOP
FRAME.



TBR-AK
HEIGHT
ADJUSTABLE KEY



TB-PV
SCREW WIND
PROTECTOR TB-
PV (100 units
Bag).

Application

Adjustable pedestals TAYG allow to regulate accurate and permanent height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fiber glass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

| Covering size | m ² / pcs. |
|---------------|-----------------------|
| 30 x 30 cm | 13,80 |
| 40 x 40 cm | 7,80 |
| 30 x 60 cm | 6,70 |
| 40 x 60 cm | 5,20 |
| 50 x 50 cm | 5,00 |
| 60 x 60 cm | 3,50 |

INDUSTRIAS TAYG, S.L.U
Avenida Real de Madrid (Norte), 70

46469 BENIPARRELL

VALENCIA – SPAIN

www.tayg.com